

100

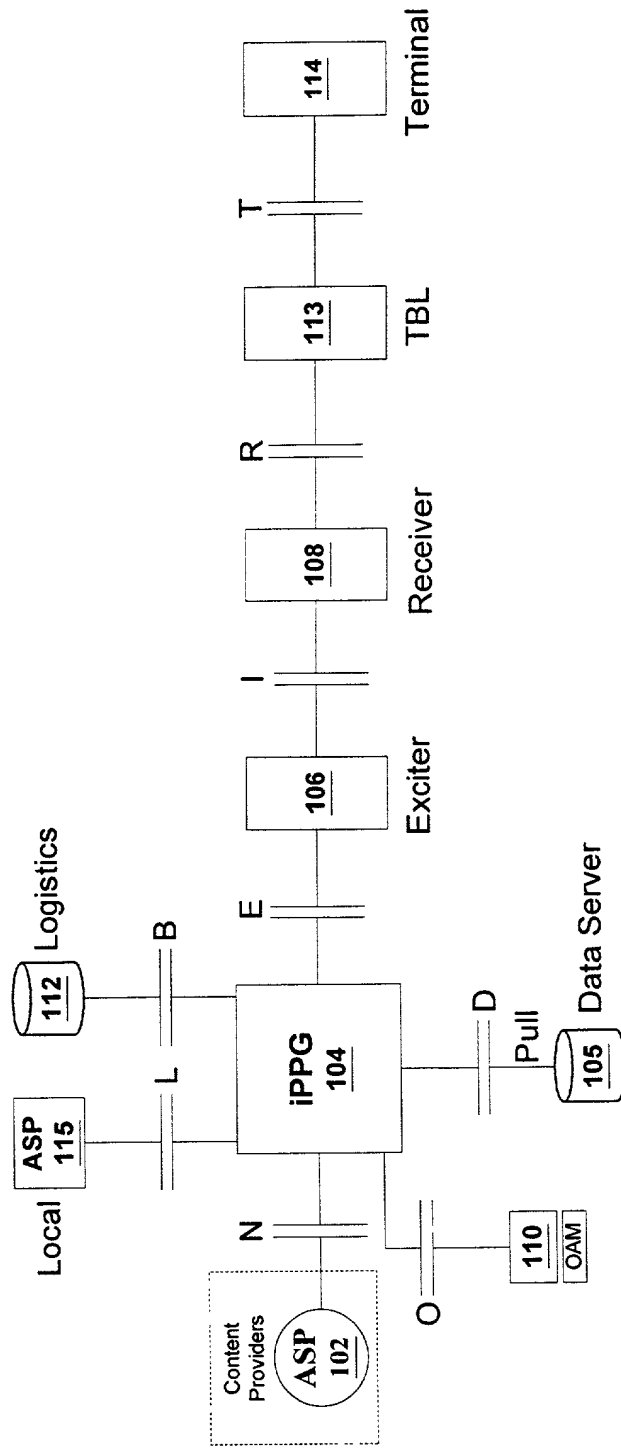


Figure 1

Entity	Interface Reference	Physical Interface	Network Interface
102	ASP - iPPG	POTS/ISP (Default)	TCP/IP (Default)
106	iPPG - Exciter	1) STL (Default) 2) POTS 3) Other loop access wireless, LMDS, Satellite	PPP or SLIP
112	iPPG - Log (CDR)	Ethernet	Resident at Station or Resident at Remote
105	iPPG - Data Server	POTS (Default)	PPP
110	iPPG - OAM	Ethernet	SNMP - MIBx
108	Exciter - Receiver	iDAB	NA
113	Receiver - TBL	Proprietary	NA
114	TBL - Terminal	One-on-One	Custom API
115	ASP - Local	Off-Line: RW Floppy/CDs On-Line: POTS	Off-Line: None On-line: TCP/IP default Others: PPP, SLIP, etc.

Table 1

Figure 2

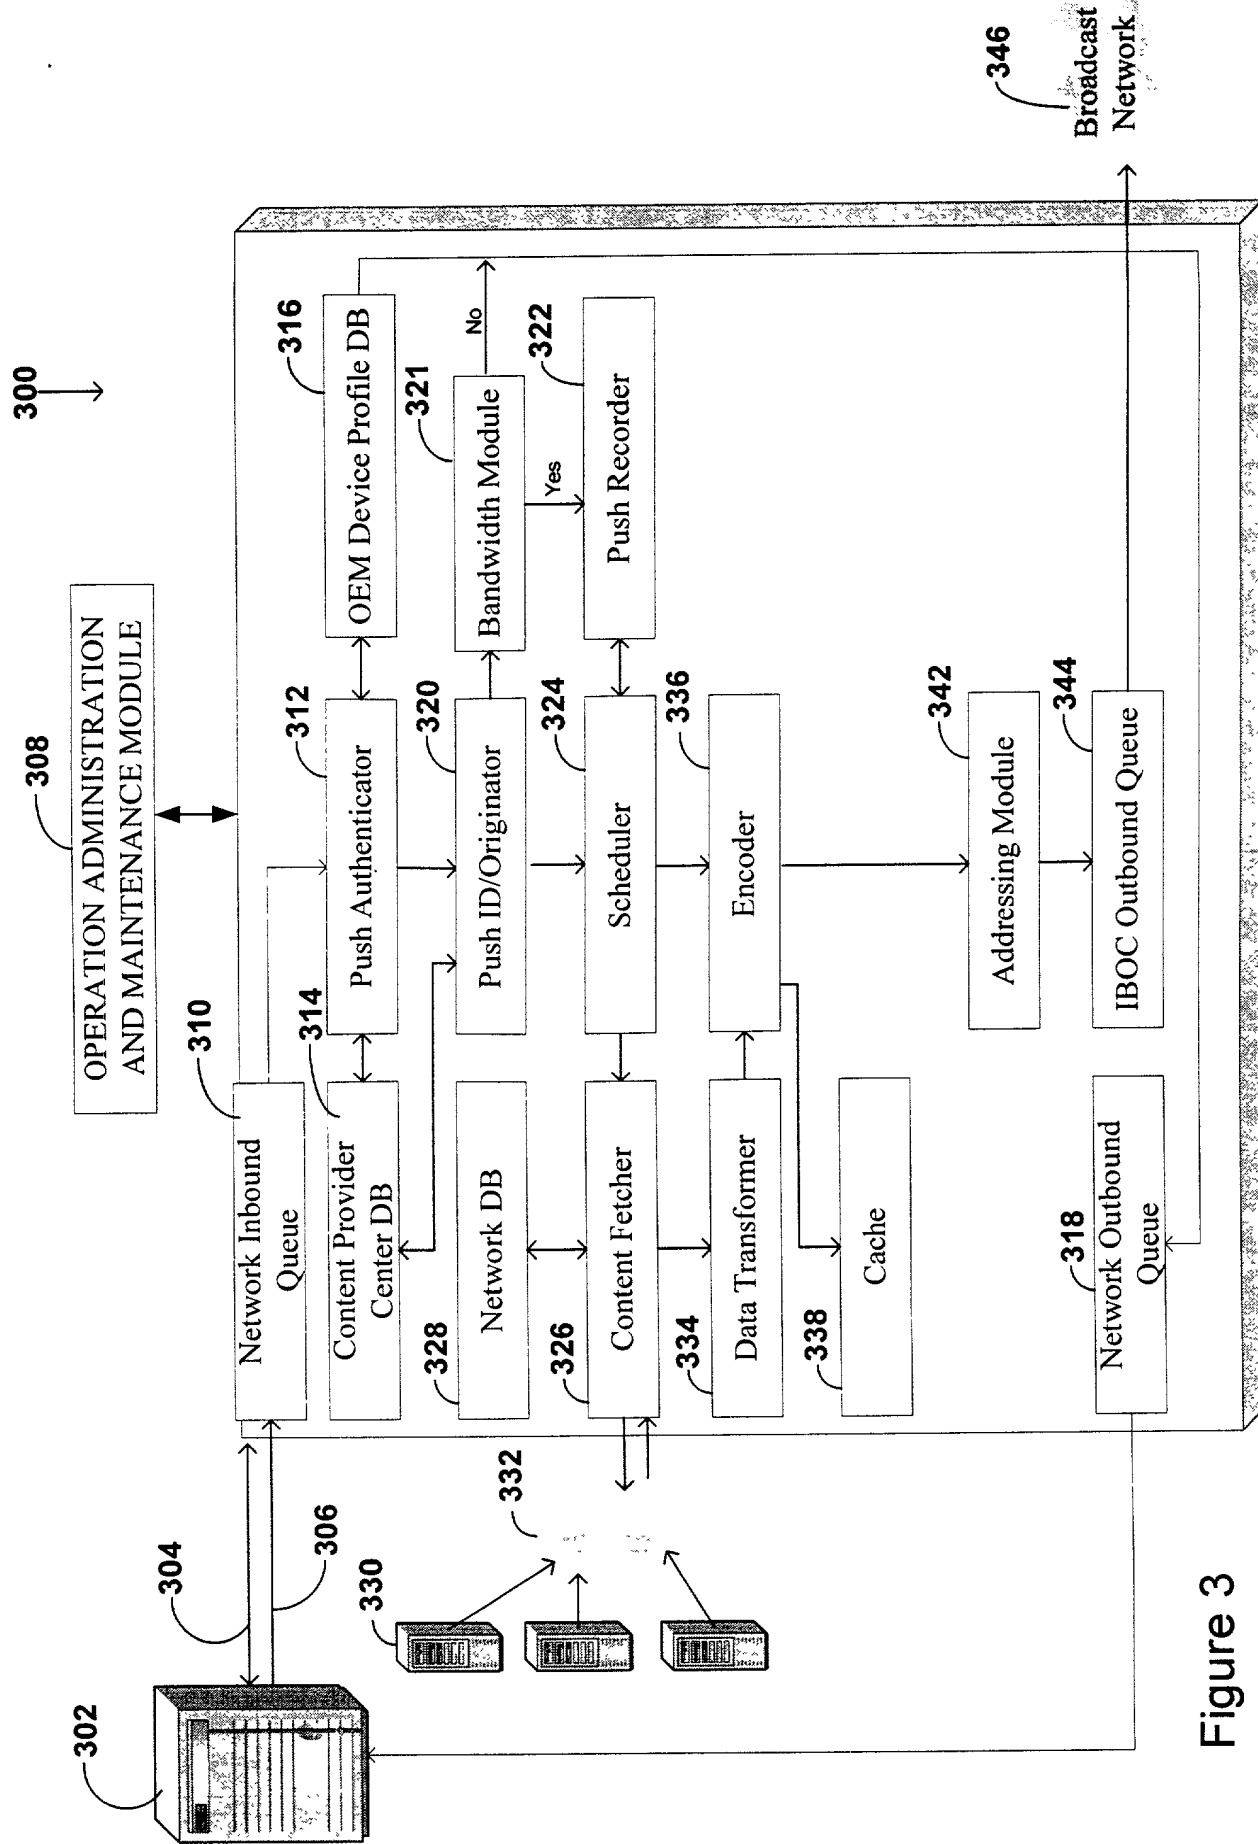


Figure 3

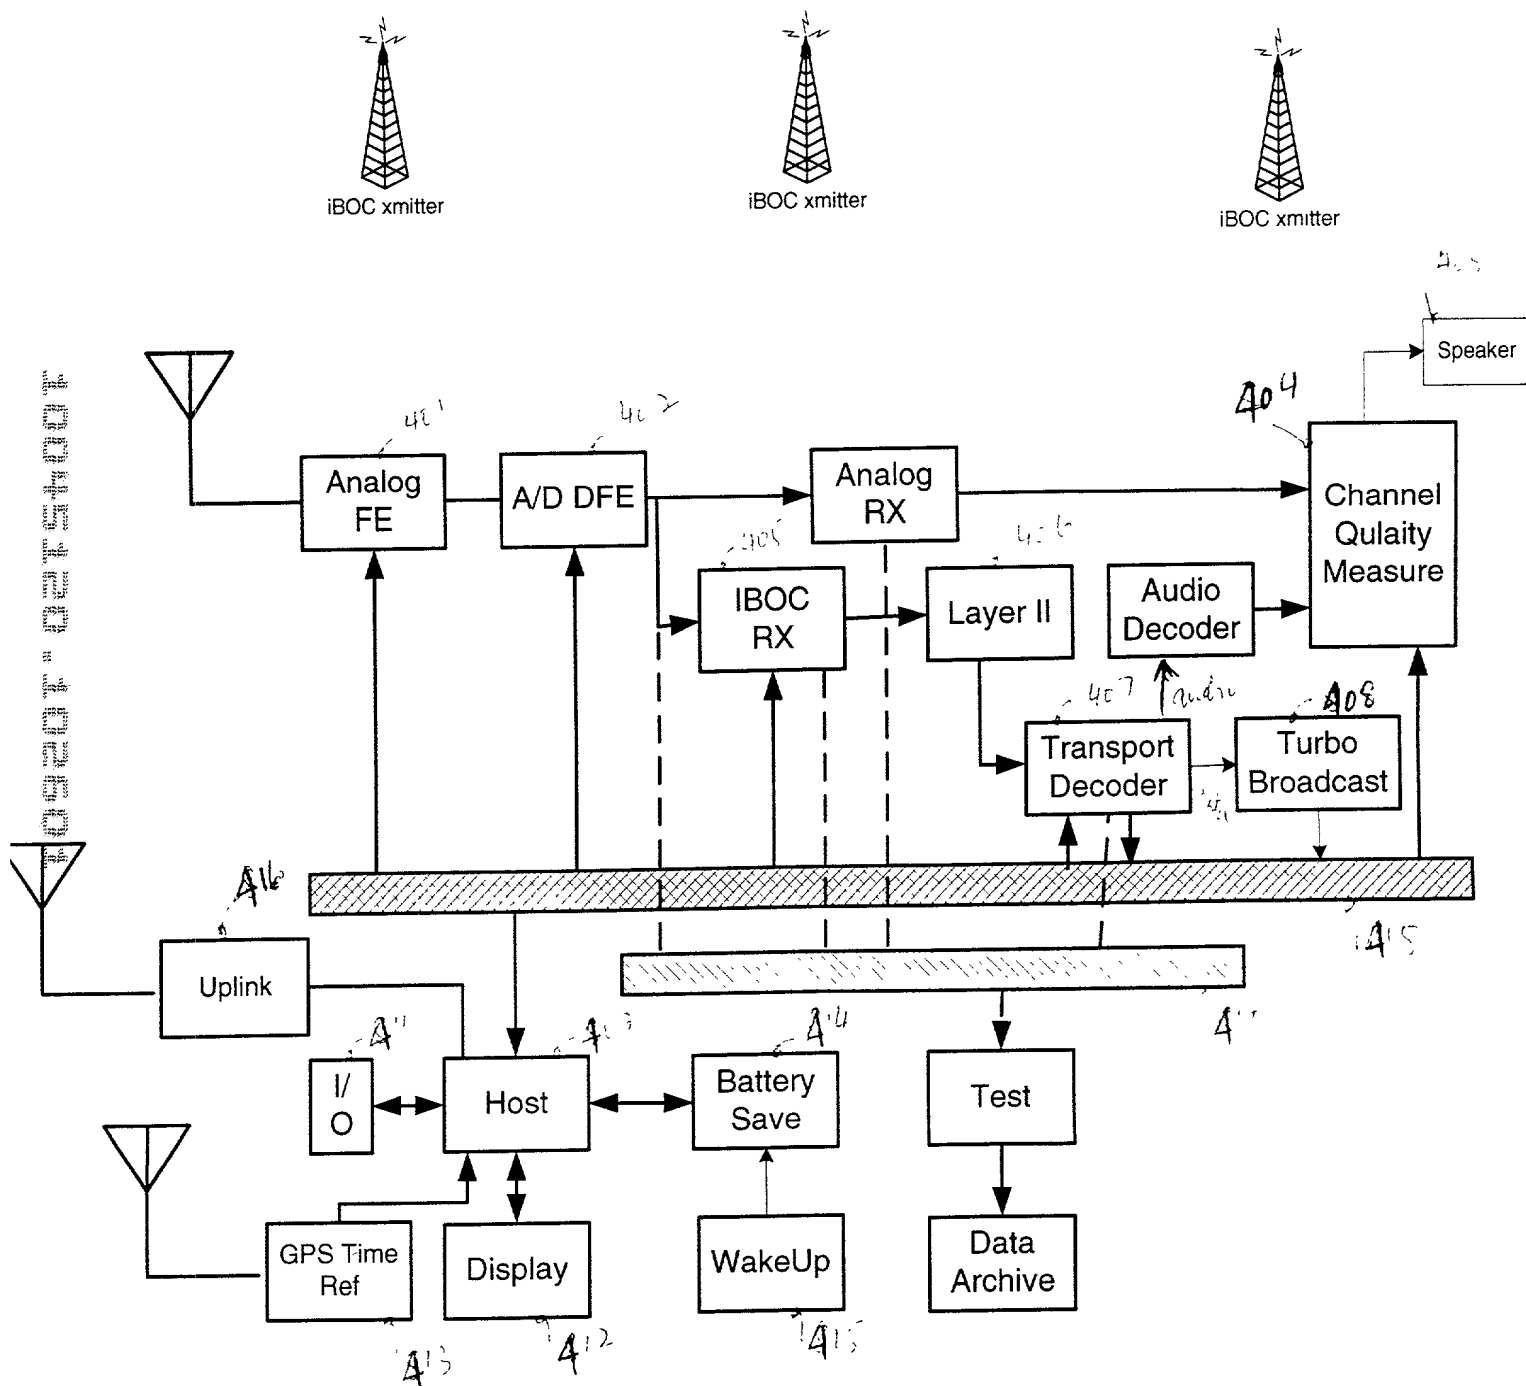


Figure 8 4

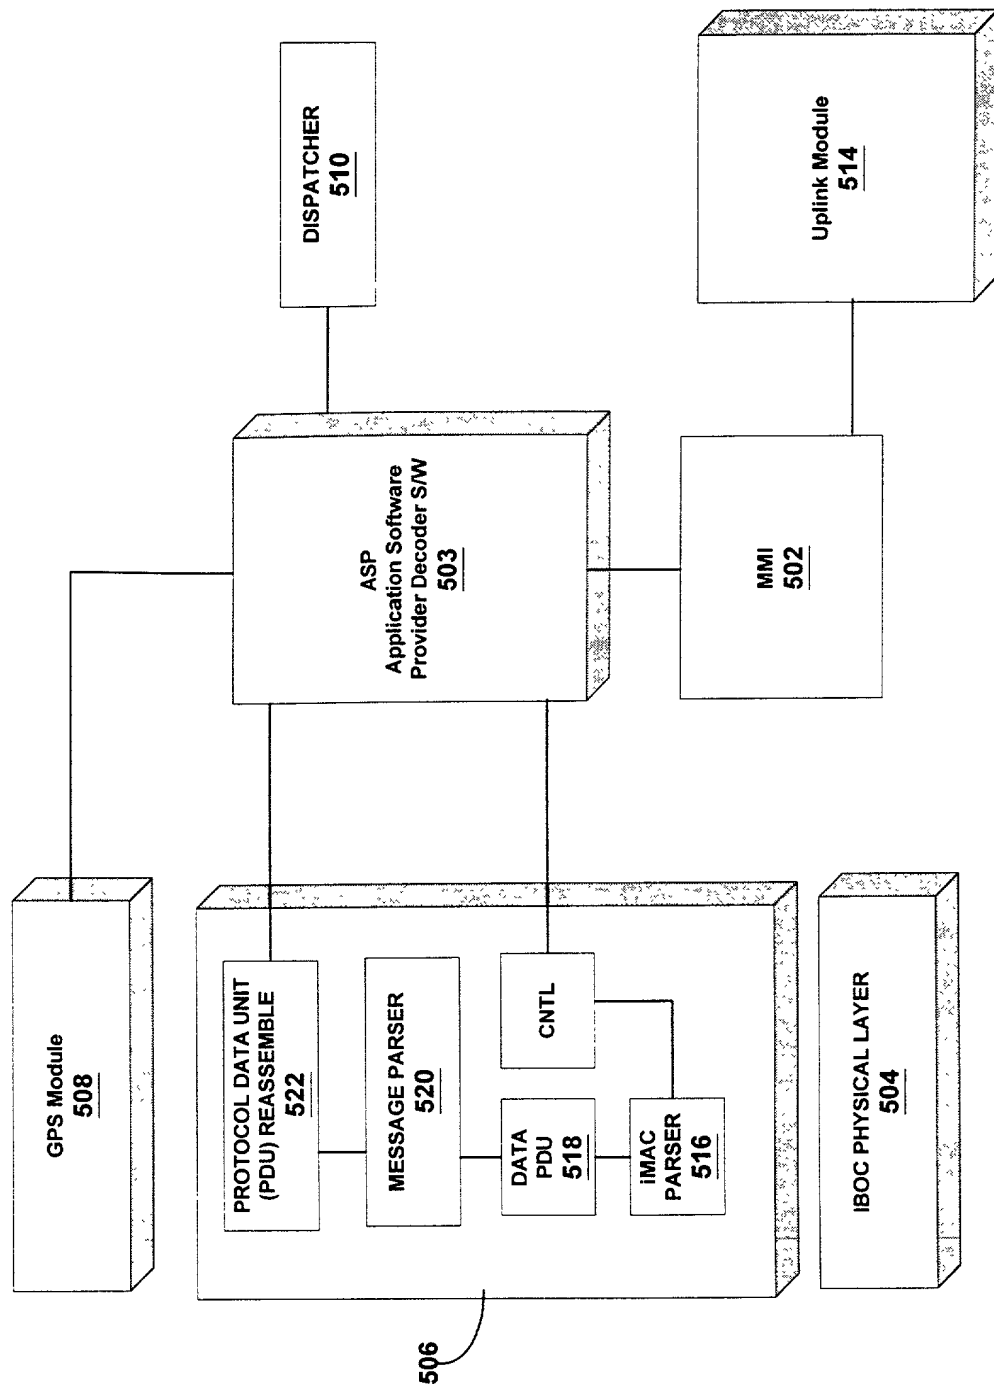


Figure 5

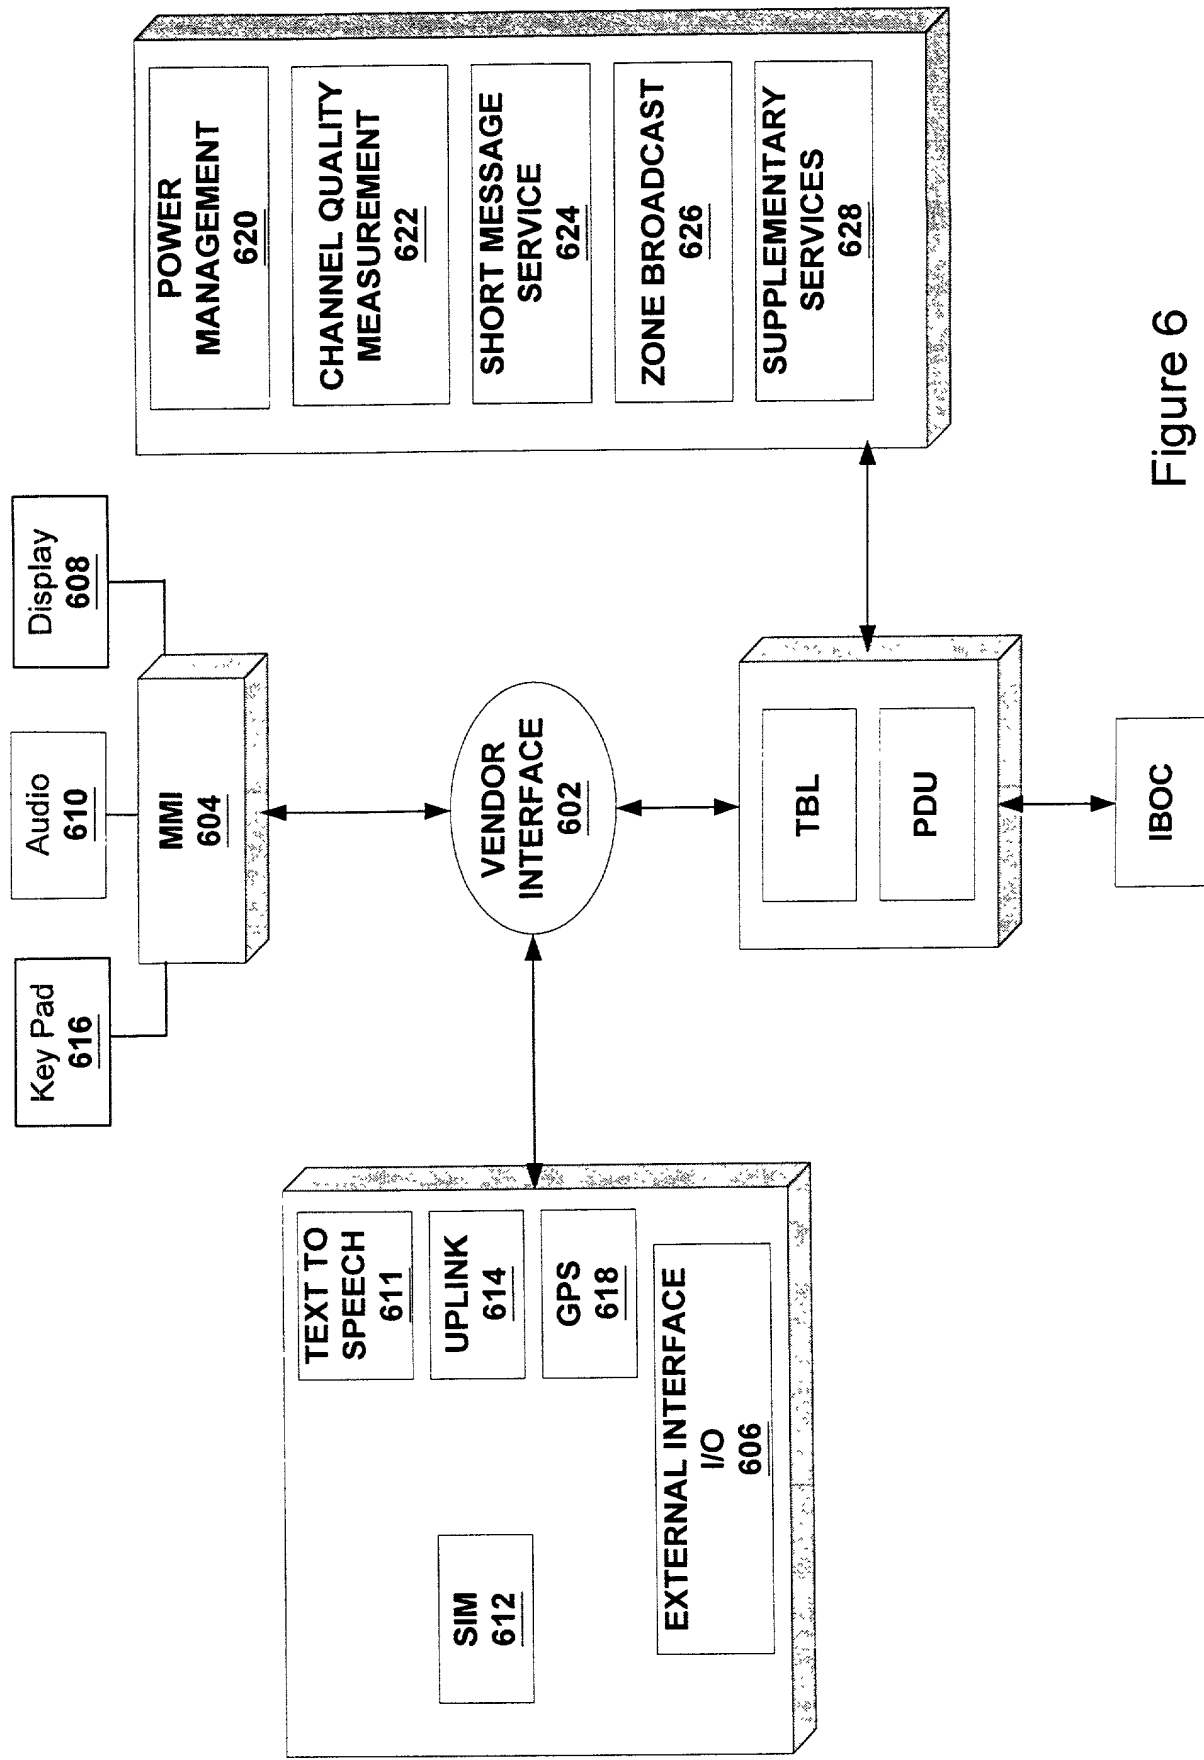


Figure 6

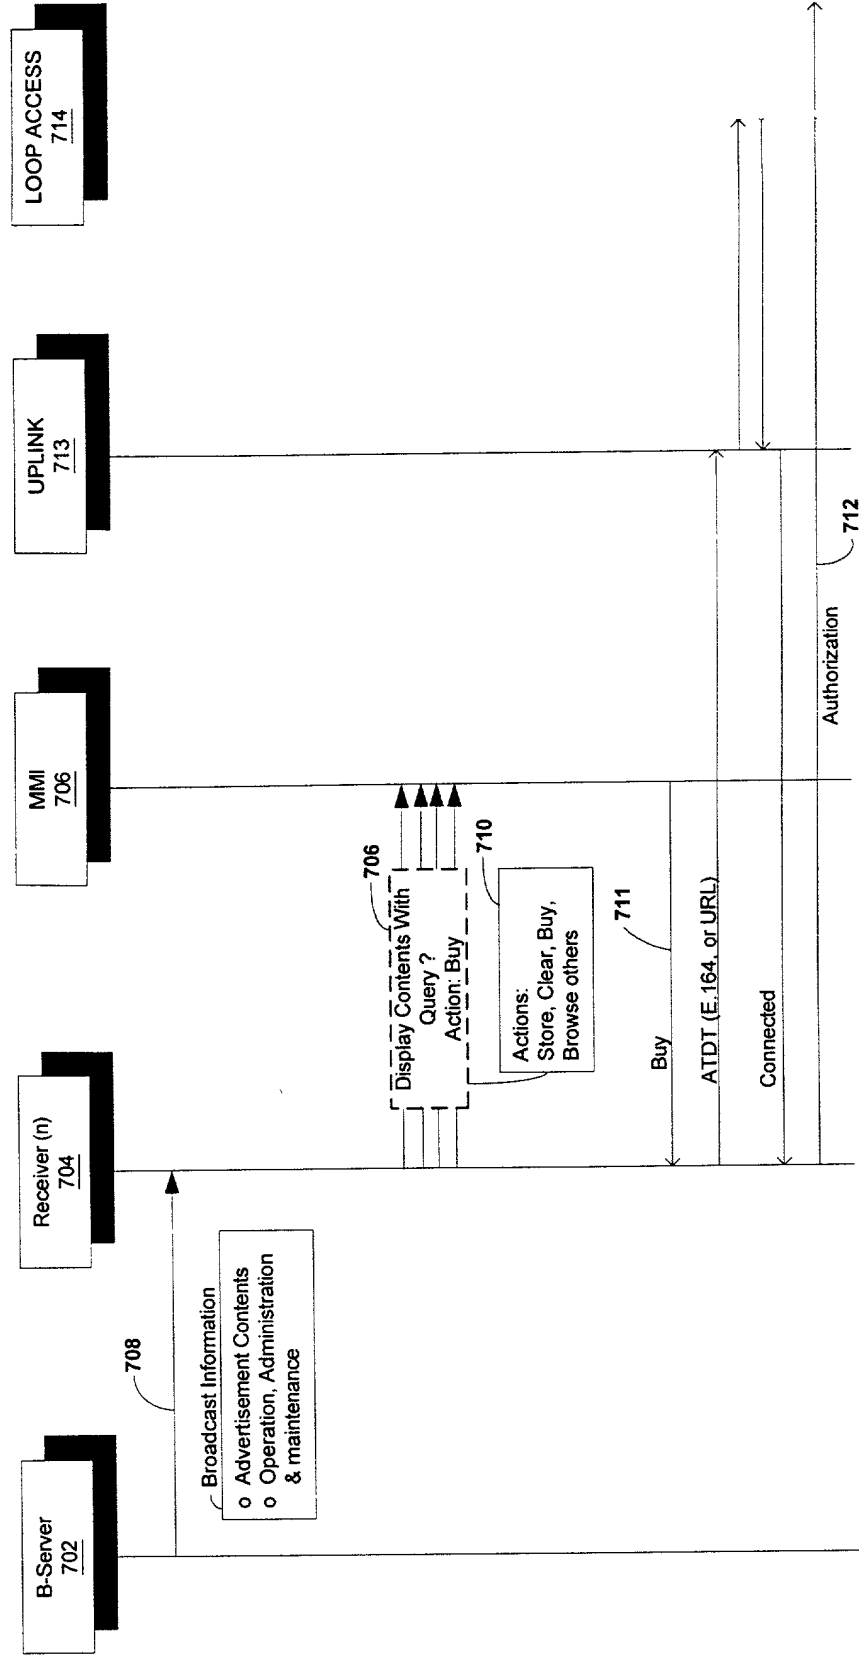


Figure 7


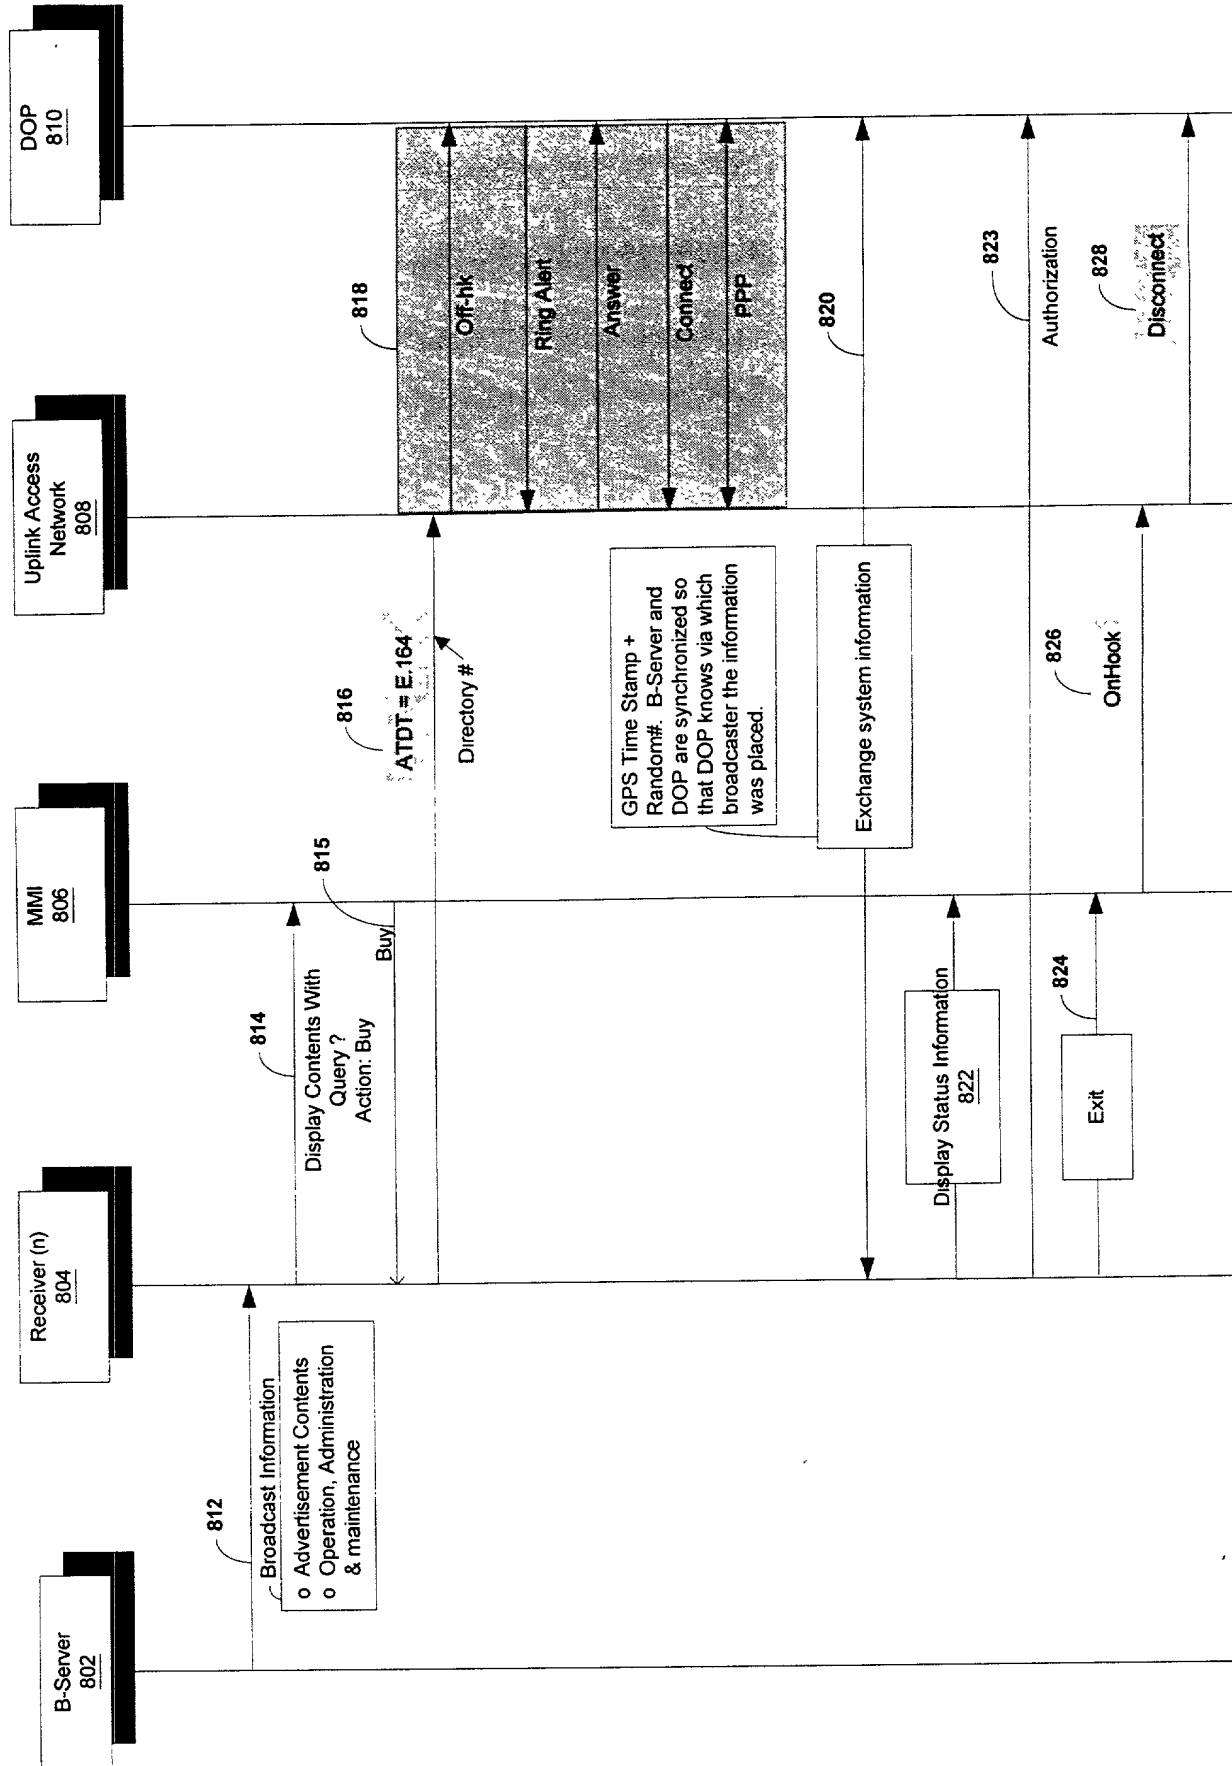


Figure 8

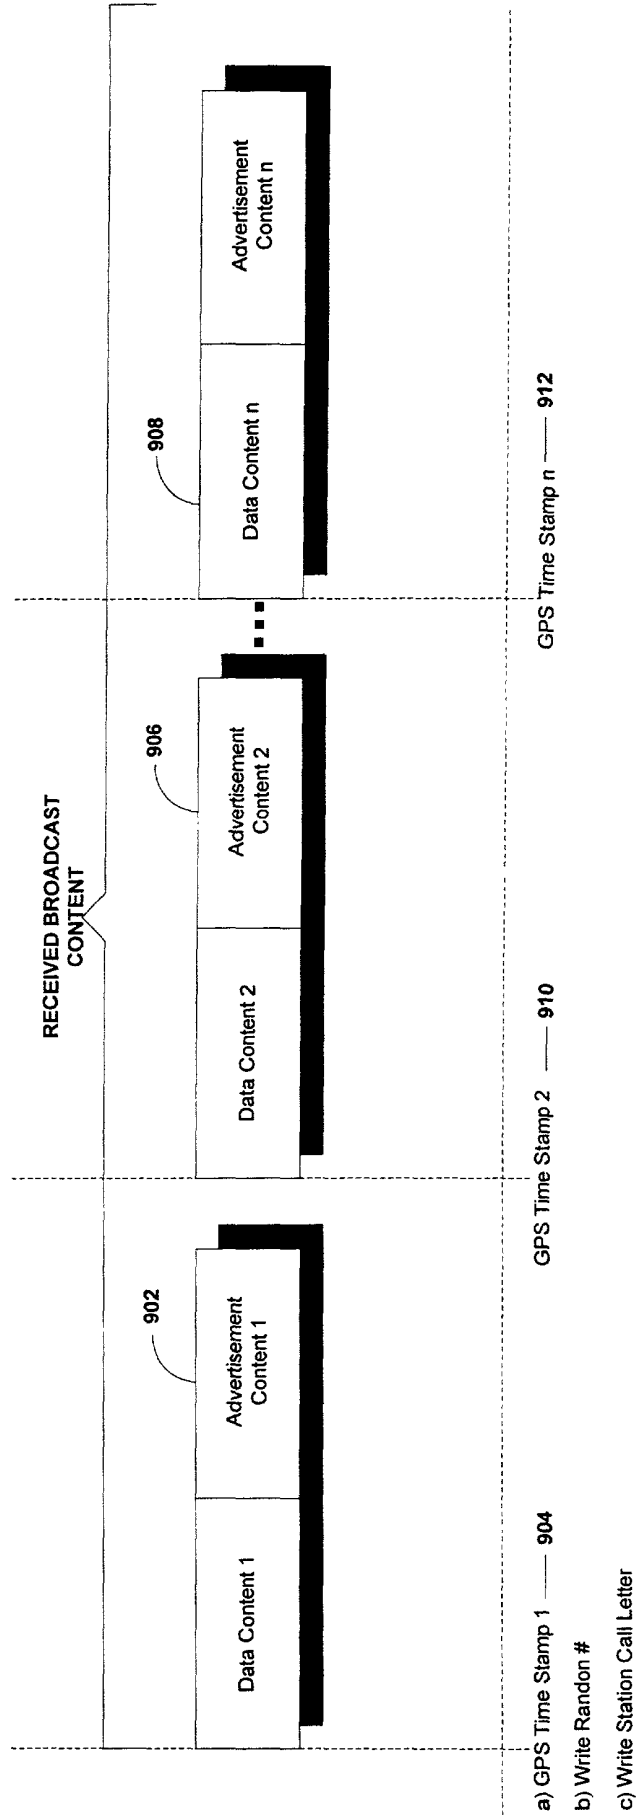

Content Identification Scheme using a, b, c, or combinations of all.

Figure 9

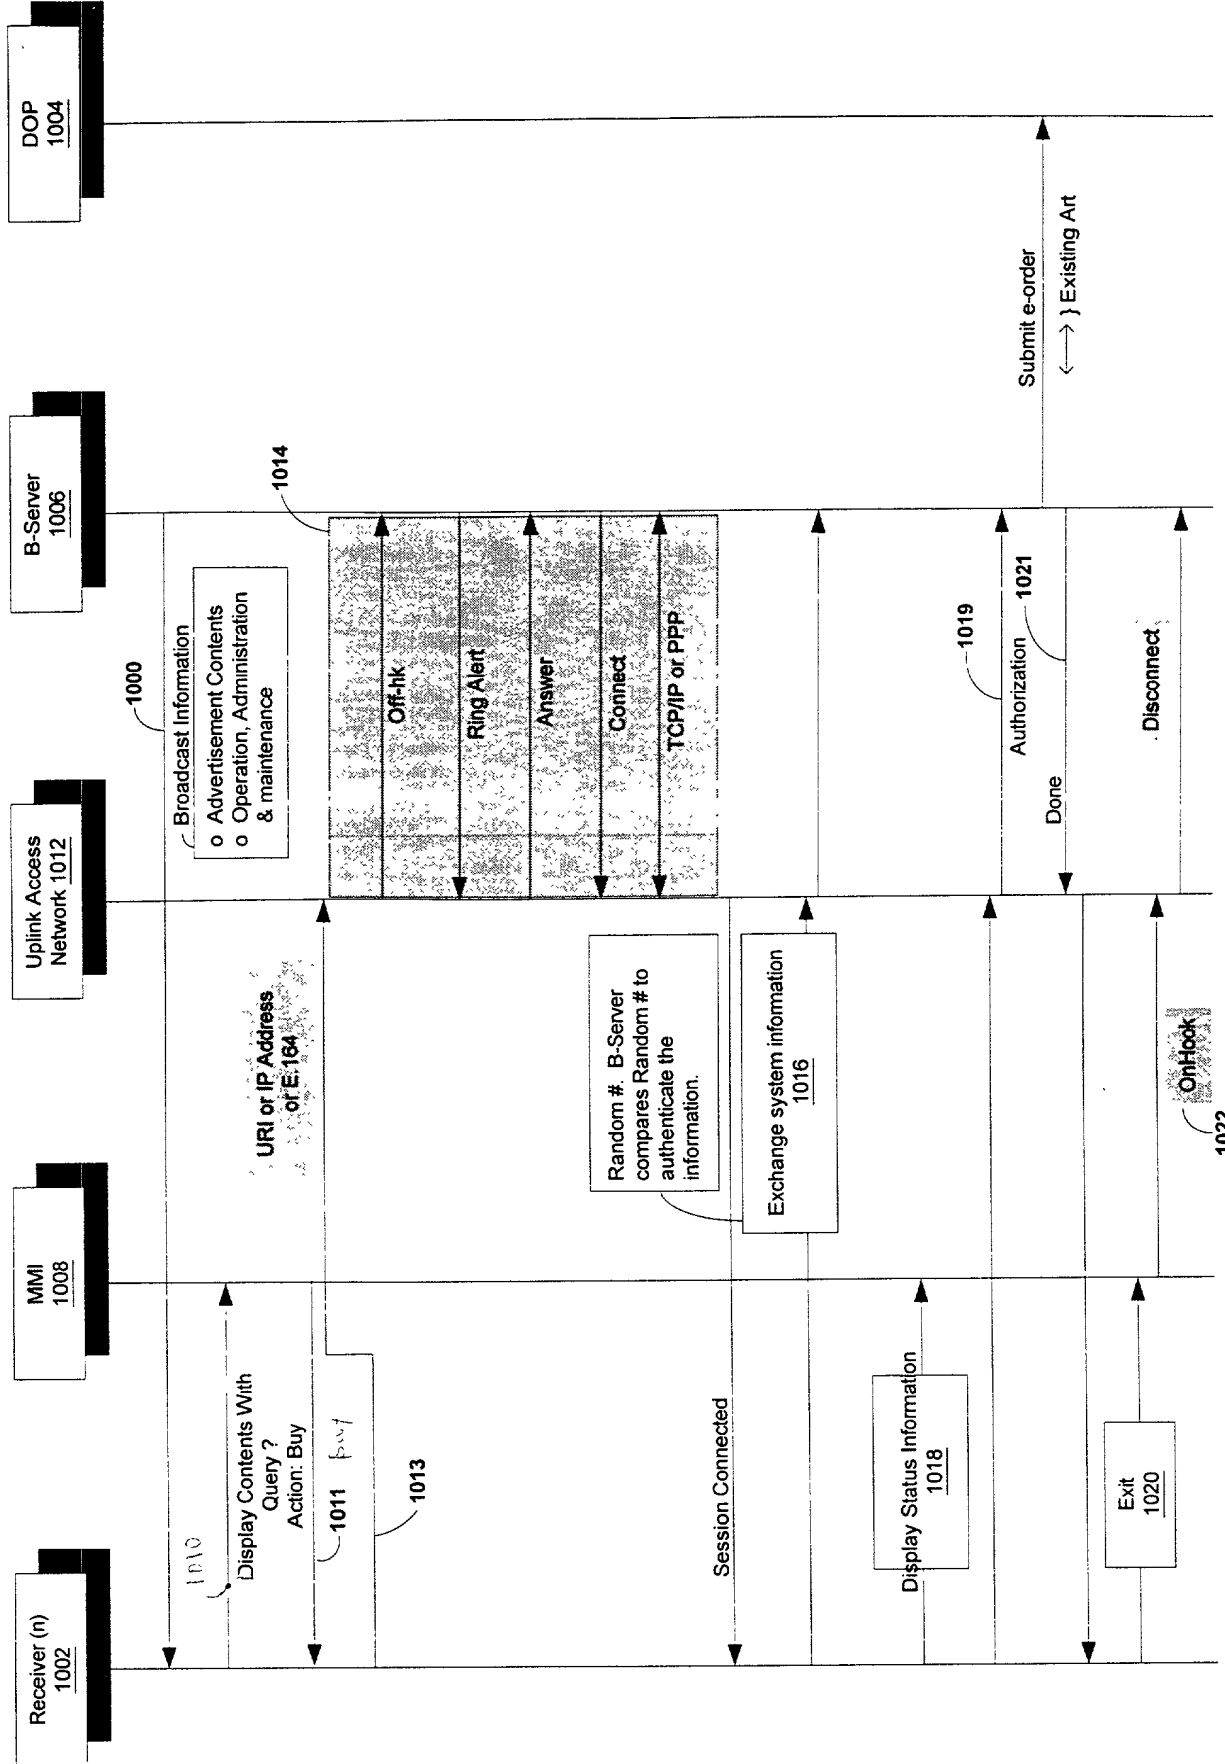


Figure 10

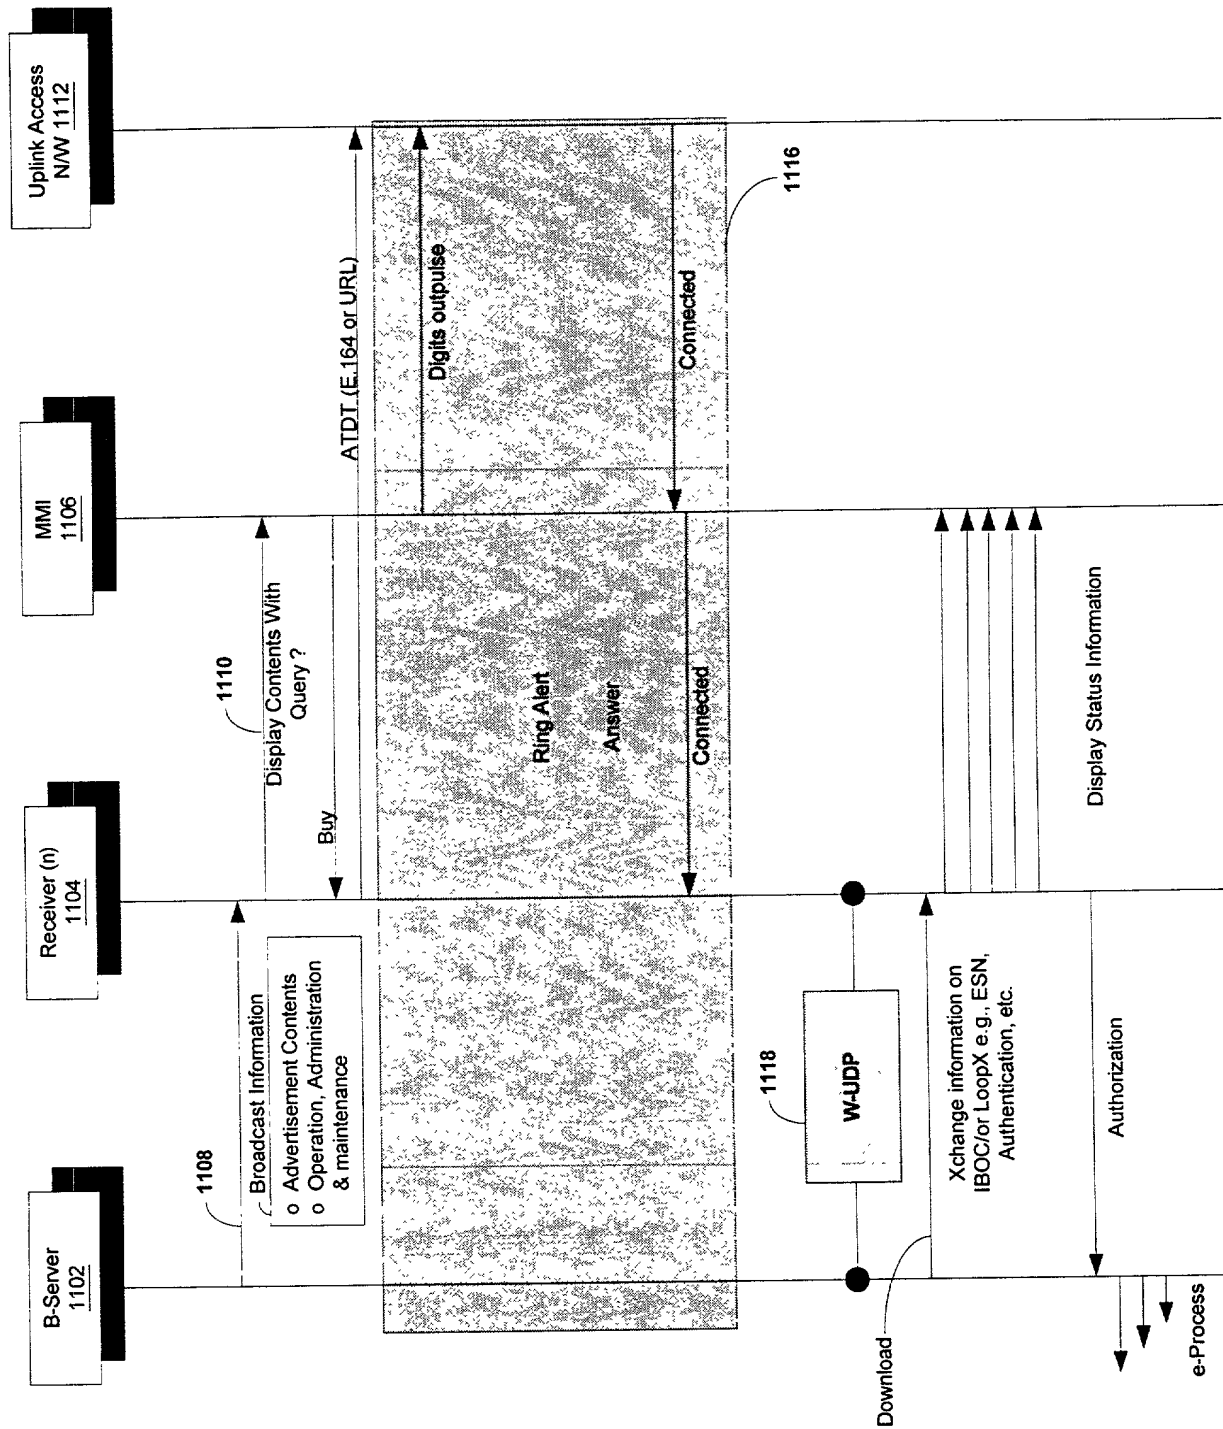


Figure 11